


Installation Instructions

Acoustical Foam

1. Installation with a water-based panel adhesive

The acoustical foams offered by Acoustical Solutions, Inc., may be adhered to walls, ceilings and other surfaces with any water-based panel adhesive. For your convenience, Acoustical Solutions offers two versions of the water-based panel adhesive, the AlphaPanel adhesive (Part #AAAD) and the Sonex Panel adhesive (Part #SPA-02). Each of the adhesives cover 32 square feet per tube and can be used in any standard caulking gun.

- > Place the sheet of foam pattern side down on a flat surface.
- > Apply a bead of adhesive along all four edges of the foam
- > Apply to more beads of adhesive so that each of the diagonal corners are connected, basically drawing an X across the foam. (see drawing below)

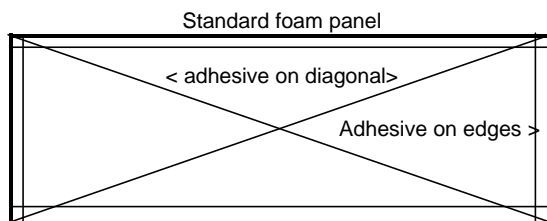

Step 2:

- > Immediately press the foam against the surface it is to be adhered to. NOTE: If the foam is allowed to sit with the adhesive on it, the adhesive will form a "skin" and will not stick effectively.

2. Installation with a spray adhesive

The acoustical foams offered by Acoustical Solutions can also be adhered to surfaces with a spray adhesive. For your convenience, Acoustical Solutions offers a AlphaSpray adhesive. This covers a total of 100 square feet per aerosol can.

Step 1:

- > Hold aerosol spray can 6" away from surface. Spray both the foam and the surface being attached to. Let both get "tacky" and apply. *Note: Be sure to have the foam in the correct spot, once you apply the foam you do not have much "play" or ability to reposition it, because the adhesive sets up quickly.

Acoustical Solutions 2852 East Parham Rd., Richmond, VA 23228
www.acousticalsolutions.com 1-800-782-5742